

7 October 1993

SUBJECT: DETERMINATION OF THE SUITABILITY OF DREDGED MATERIAL TESTED UNDER PSDDA EVALUATION PROCEDURES FOR THE SINCLAIR INLET MARINA (91-2-00001) FOR DISPOSAL AT THE PSDDA ELLIOTT BAY OR PORT TOWNSEND OPEN WATER DISPOSAL SITE.

1. The Sinclair Inlet Marina proposes to dredge 1,900 cubic yards of sediments from its marina at Port Orchard Washington. The following summary reflects the PSDDA agencies' (Corps of Engineers, Department of Ecology, Department of Natural Resources and the Environmental Protection Agency) consensus decision on the acceptability of the sampling plan and all relevant test data to make a determination of suitability for the disposal of the material at the PSDDA Elliott Bay or Port Townsend open-water disposal sites.
2. The ranking for the project area was "high", based on the guidance provided in the PSDDA Management Plan Report, Phase II (page A-11) for the Sinclair Inlet area.
3. A sampling and analysis plan was developed for this project and approved by the PSDDA agencies on 7 July 1993.
4. One dredged material management unit (DMMU) was characterized, with surface samples taken from two locations and composited for one analysis.
5. The chemistry data indicated that no detected exceedances of the Dredging Year 1993 PSDDA screening levels (SL) occurred. There were no detection limits reported above SL.
6. The Sinclair Inlet Marina was constructed in 1989. Since the marina was constructed after the State of Washington restricted the use of Tributyltin (TBT) in boat maintenance activity, the PSDDA agencies determined that TBT testing was not required for this marina.
7. In summary, the PSDDA-approved sampling and testing plan was followed, and quality assurance, quality control guidelines specified by PSDDA were generally complied with during testing. The data gathered were deemed sufficient and acceptable for a determination of suitability under the PSDDA program.
8. Based on the analysis of the chemical results for the Sinclair Inlet Marina, the PSDDA agencies concluded that all 1,900 cubic yards of proposed dredged material were suitable for unconfined open-water disposal at a PSDDA dispersive or non-dispersive site.
9. This memorandum documents the suitability of proposed dredged sediments for disposal at a PSDDA open-water disposal site. It does not constitute final agency approval of the project. A public notice will be issued for this project. During the public comment period which follows a public notice, the resource agencies will provide input on the overall project. A final decision will be made after full consideration of agency input, and after an alternatives analysis is done under section 404 (b)1 of the Clean Water Act.

CENPS-OP-DMMO
Sinclair Inlet Marina
91-2-00001

Concur:

10/14/93
Date

David R. Kendall
David Kendall, Ph.D
Seattle District Corps of Engineers

10/17/93
Date

Stephanie Stirling
Stephanie Stirling
Seattle District Corps of Engineers

10/19/93
Date

Justine S. Barton
Justine Barton
Environmental Protection Agency, Region X

10/25/93
Date

Sandra L Manning
Sandra Manning
Washington Department of Ecology

10/27/93
Date

Gene Revelas
Gene Revelas
Washington Department of Natural Resources


Copies Furnished:
Arlie Winther/CENPS-OP-RG
Tom Mueller/CENPS-OP
Robert Morrow/Pentec
DMMO file

EPA/Justine Barton
DOE/Sandra Manning
DNR/Gene Revelas

TIDAL INFORMATION

Name	Place (Lat/Long)	Height referred to datum of soundings (MLLW)			
		Mean Higher High Water	Mean High Water	Mean Low Water	Extreme Low Water
Port Blakely	(47°36'N/122°30'W)	11.5	10.6	2.8	-4.5
Brownsville	(47°39'N/122°37'W)	11.7	10.8	2.8	-4.5
Bremerton	(47°33'N/122°38'W)	11.7	10.8	2.8	-4.5
Seattle, Elliott Bay	(47°36'N/122°20'W)	11.4	10.5	2.8	-4.5

PROJECT LOCATED AT
 LAT. 47° 32' 28" N
 LONG. 122° 38' 43" W

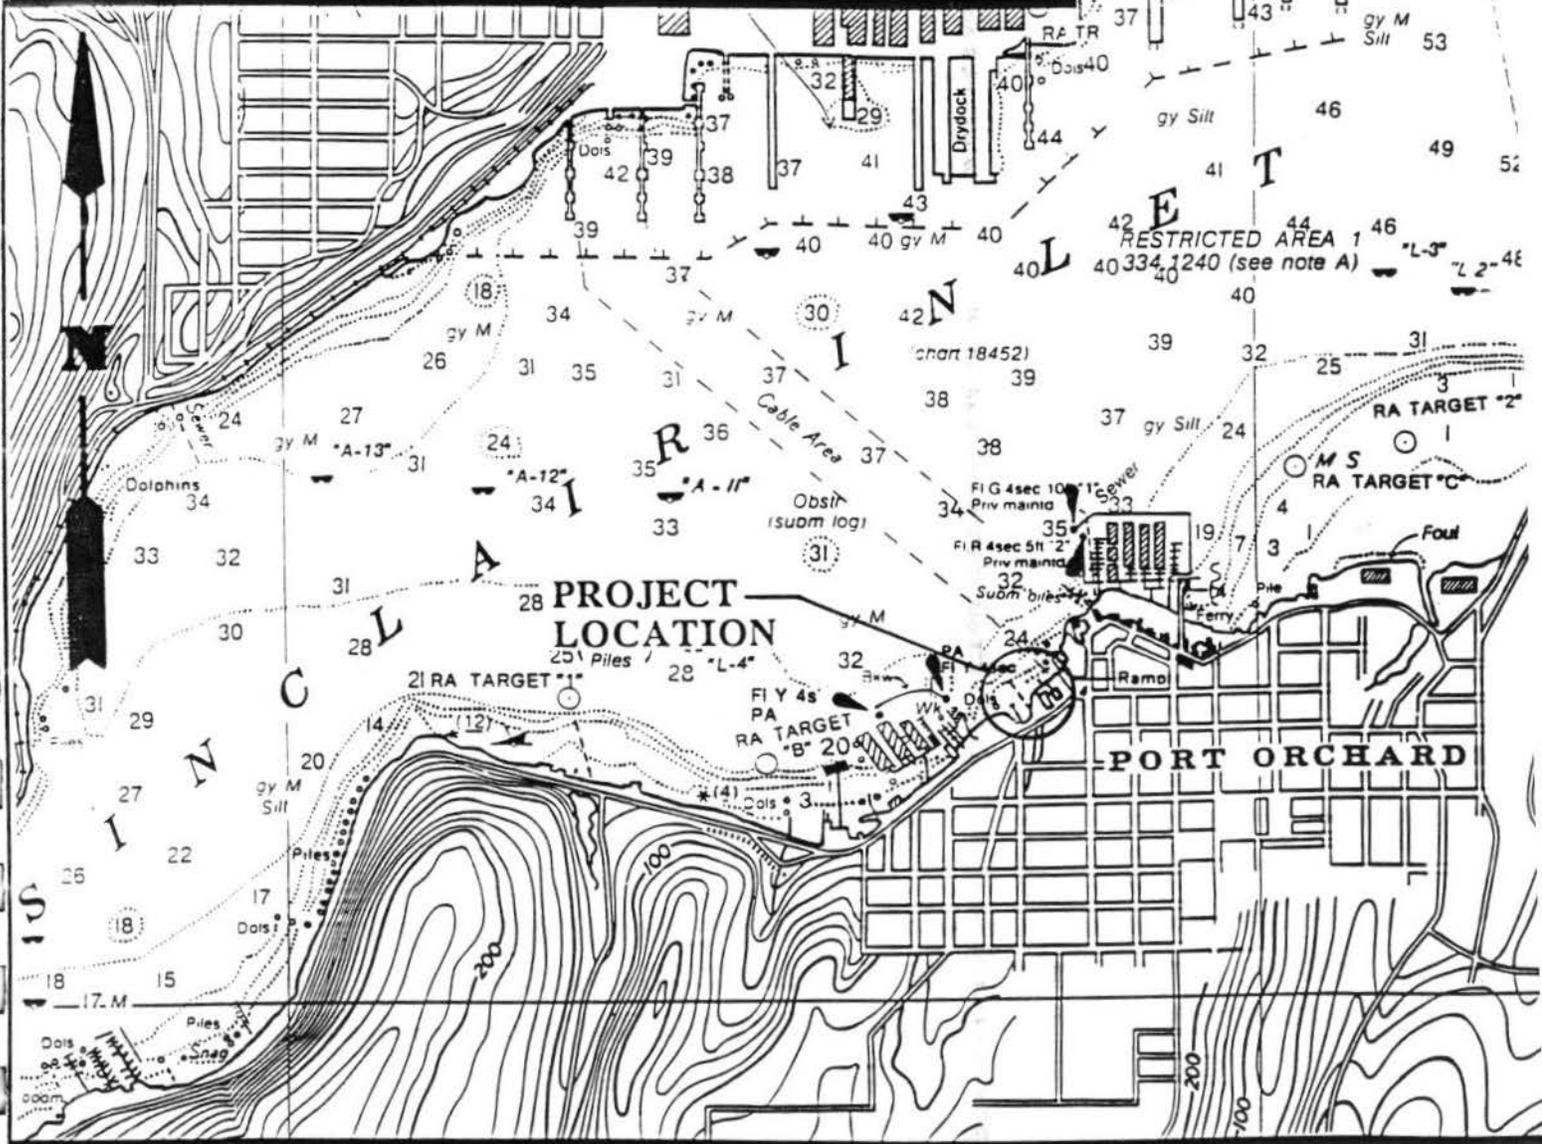

PURPOSE:
 MAINTAIN WATER DEPTH FOR
 BOAT MOORAGE AT EXISTING
 SLIPS

DATUM: 0.0' M.L.L.W.
ADJACENT PROPERTY OWNERS:
 1) CITY OF PORT ORCHARD
 2) KENNETH BLAKE


Figure 1 Area map.

SCALE AS NOTED

W. J. TIERRIAN
 501 BAY STREET
 PORT ORCHARD, WA. 98336

PROPOSED: DREDGE APPROX.
 1900 Cu. Yds. OF SEDIMENT
 FROM MOORAGE AREA TO EL. -4.5
IN: SINCLAIR INLET
AT: PORT ORCHARD, WA.

APPLICATION BY:
 W. J. TIERRIAN
 501 BAY ST. PORT ORCHARD, WA.
SHEET 1 of 3 DATE: 4/1993

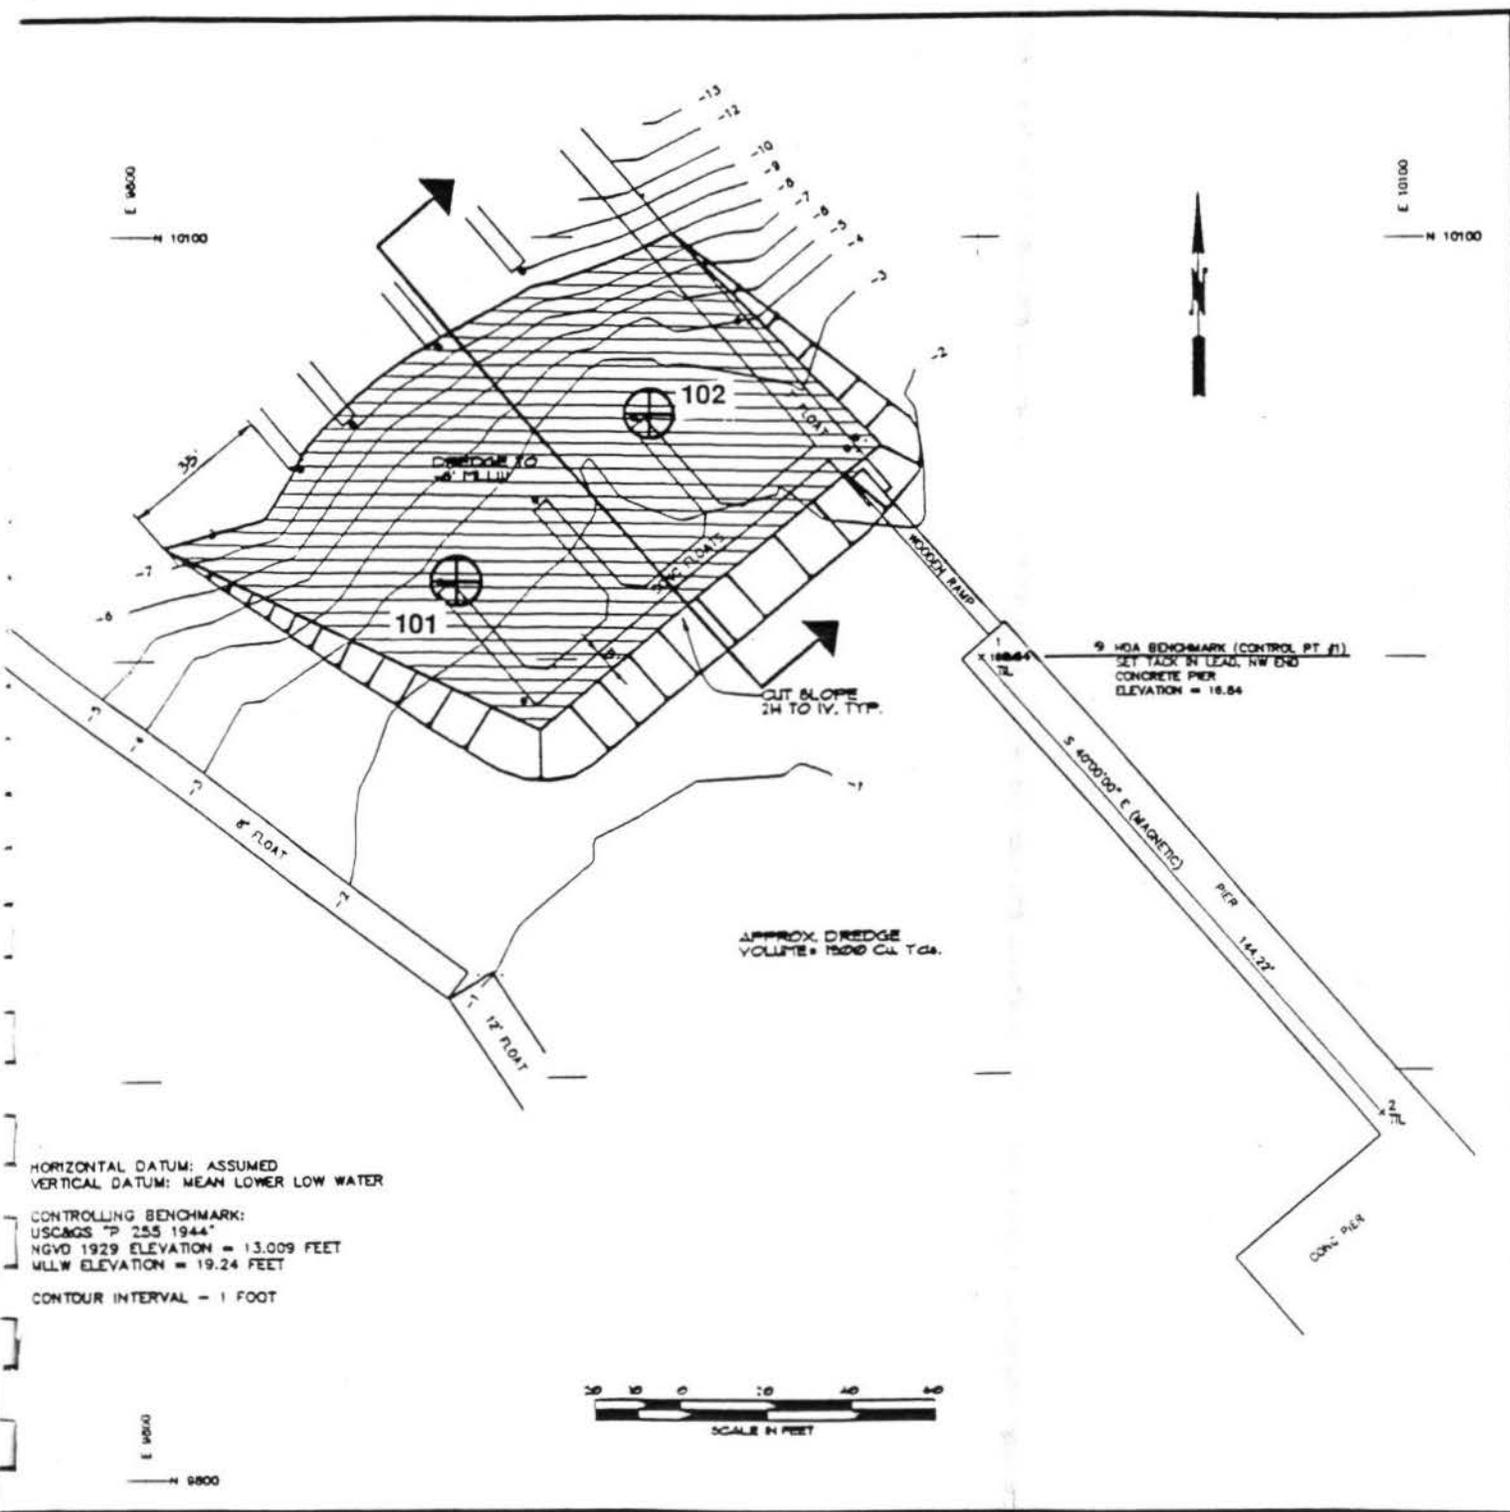

HORIZONTAL DATUM: ASSUMED
 VERTICAL DATUM: MEAN LOWER LOW WATER

CONTROLLING BENCHMARK:
 USCGS "P 255 1944"
 NGVD 1929 ELEVATION = 13.009 FEET
 MLLW ELEVATION = 19.24 FEET

CONTOUR INTERVAL = 1 FOOT



PURPOSE:
 MAINTAIN WATER DEPTH FOR
 BOAT MOORAGE AT EXISTING
 SLIPS

DATUM: 0.0' M.L.L.W.

ADJACENT PROPERTY OWNERS:
 1) CITY OF PORT ORCHARD
 2) KENNETH BLAKE

**Figure 2 Project area
 (including surface core locations).**

SCALE AS NOTED

W. J. TIERRIAN
 501 BAY STREET
 PORT ORCHARD, WA. 98336

PROPOSED: DREDGE APPROX.
 1900 Cu. Yds. OF SEDIMENT
 FROM MOORAGE AREA TO EL -3'
 IN SINCLAIR INLET
 AT PORT ORCHARD WA.

APPLICATION BY:
 W. J. TIERRIAN
 501 BAY ST. PORT ORCHARD, WA.
 SHEET 2 of 3 DATE: 1/1993